



How to use Email to SMS

Version 1.0

Yeostar Information Technology Co. Ltd

Make sure GSM/UMTS module is installed well, the signal of GSM/UMTS trunk is fine.

Before testing this feature, please make sure the POP3 testing successfully in 'Email settings', tick 'Enable email to SMS' and 'country code'

Enable Email To SMS

Enable Country Code:

Country Code: China +86

Receive Emails Interval: 60

Access Code:

Email Settings

Note:

1. (1) If you want to use 'SMS to Email', please configure SMTP setting. (2) If you want to use 'Email to SMS', please configure POP3 setting.
 2. If you configure the POP3 setting, MyPBX will download emails from the mail server regularly. Once downloaded, the emails will be deleted from the mail server.

Email Address: lears@yeastar.com

Password: ●●●●●●●●

SMTP Server (SMTP): smtp.yeastar.com

SMTP Server Port: 25

Receive Server (POP3): pop.yeastar.com

Receive Server Port: 110

Use SSL/TLS for security on this server(SMTP)

Test SMTP Settings Test POP3 Settings

Figure 1-1

Then we need send an email to the specified email address (the one in Email Settings. In this case, it is lears@yeastar.com).The content of this email will be sent to the number you want as message. The subject (title) of the email will determine the number. Here are some examples of the formats to the subject of the email.

Example:

1. Send message with no PIN code and default GSM port.

Format: phonenumber

if the subject is "12345678", the text of this email("Welcome to Yeastar!") will be sent to number "12345678" through the first available GSM trunk(No pin code should be set by administrator).

To: lears@yeastar.com

Subject: 12345678

Insert: Attachments Office docs Photos From Bing Emoticons

Tahoma 10 B I U

Welcome to Yeastar!

Figure 1-2

2. Send message with no PIN code and specified GSM port.

Format: port:portnumber-phonenummer

if the subject is "port:9-12345678", the text of this email ("Welcome to Yeastar!") will be sent to the number "12345678" through GSM trunk 9 (No pin code should be set by administrator).

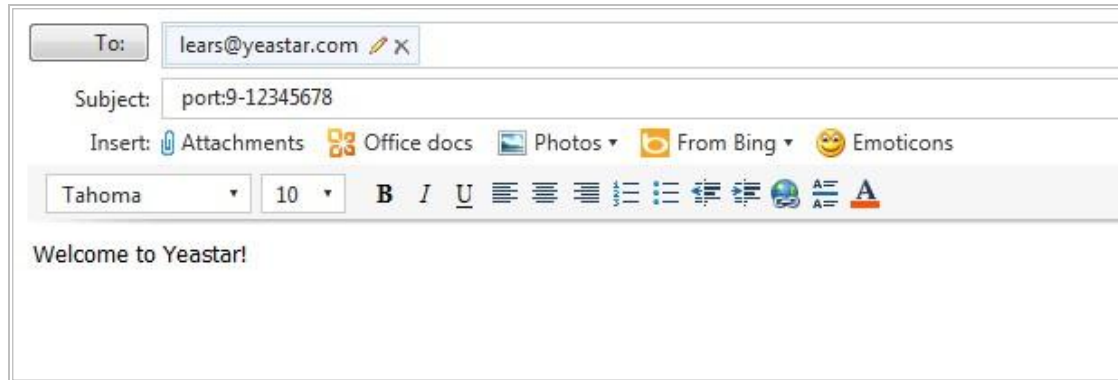


Figure 1-3

3. Send message with PIN code and default GSM port.

Format: 500:pincode-number-phonenummer

if the subject is "500:987-12345678", the text of this email ("Welcome to Yeastar!") will be sent to number "12345678" through the first available GSM trunk ("987" is the pin code set by administrator).

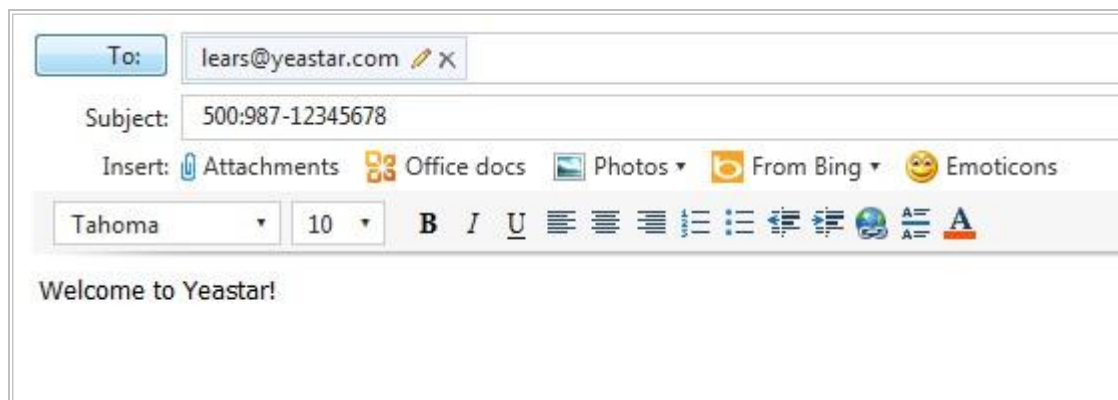


Figure 1-4

4. Send message with PIN code and specified GSM port.

Format: 500:pincode-number-port:portnumber-phonenummer

if the subject is "500:987-port:9-12345678", the text of this email ("Welcome to Yeastar!") will be sent to number "12345678" through GSM trunk 9 ("987" is the pin code set by administrator).

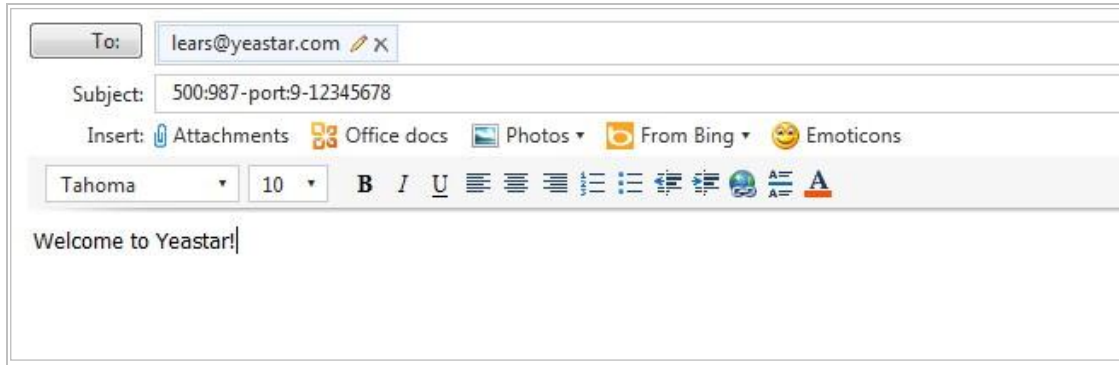


Figure 1-5

<The end>